


Valve Drive for Three-Port Valve

Actuating Power: 500N

Dimensions in mm

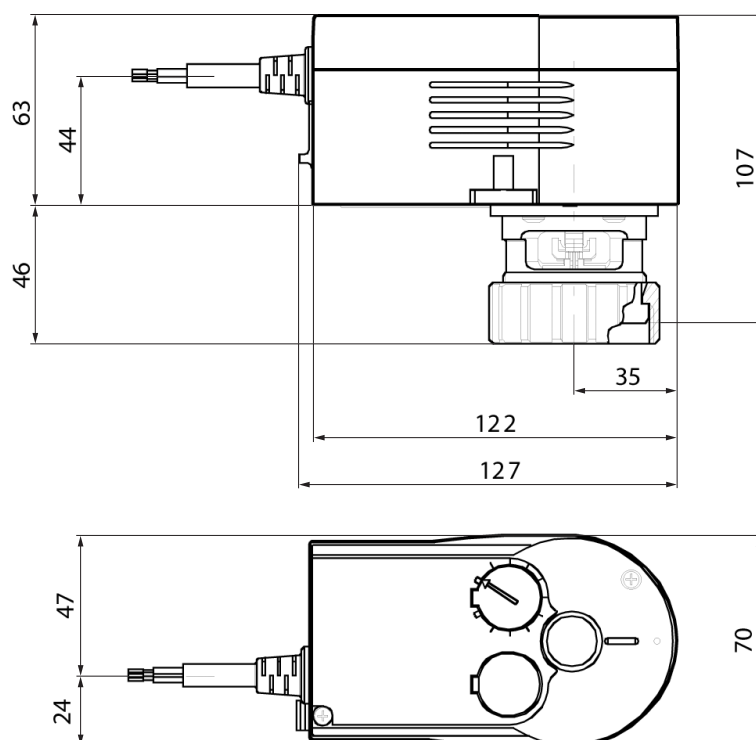

Design

Two-part housing made of self-extinguishing plastic, lower section black, upper section yellow; Synchronous motor with control and electronic cut-off; Maintenance-free gearbox with magnetic clutch; Console made of glass-fibre-reinforced plastic; Brass box nut for fitting valve; Gearbox that can be disengaged for positioning valve manually (Allen key included)

- 1 **7712 11** **Actuation of three-way valves 24 V** For controllers with continuous output (0...10 V) or switching output (2-point or 3-point control).
- 1 **7712 50** **Actuation of three-way valves 230 V**
For controllers with a switching output (2/3-point control).
- 1 **7712 51** **Actuation of three-way valves 24 V**
For controllers with a switching output (2/3-point control).

Installation

vertical to horizontal, but not upside down

Technical data General

	1 7712 11	1 7712 50/51
Running time	60 / 120 s	120 s
Stroke		8 mm
Pushing force		500 N
Weight		0,7 kg
Max. operating temperature		100 °C on valvebody
Ambient temperature		-10 to 55 °C
Ambient humidity		5 to 95% r.F.
Degree of protection		IP 54 (EN 60529)


1 7712 11	Control signal	0 to 10 V, Rj > 100 kOhm
	Positional feedback signal	0 to 10 V, load > 10 kOhm
	Starting point U0	0 to 10 V
	Control span delta U	10 V
	Switching range Xsh	200 mV
	Power supply	24 V +/- 20%, 50 to 60 Hz
	Power consumption	60 s 120 s
	Operating	7 VA 5 VA
	Standstill	0,5 VA 0,5 VA
	Response time	200 ms
1 7712 50	Power supply	230 V +/- 15%, 50 to 60 Hz
	Power consumption	120 s
	Operating	1,6 VA
	Standstill	1,6 VA
	Response time	100 ms
1 7712 51	Power supply	24 V ~ +/- F95 20%, 50 to 60 Hz
	Power consumption	120 s
	Operating	1,5 VA
	Standstill	1,5 VA
	Response time	100 ms

Accessories


1 4037 ..	HERZ-Three-Way Mixing and Diverting Valves
1 7796 04	Transformer 230 V / 24 V, 50 Hz, 50 VA
1 7793 23	HERZ-Electronic Heating Controller 110-230 V
1 7793 24	HERZ-Electronic Heating Controller 24 V
1 7793 01	External temperature probe for heating controller
1 7793 00	Touch temperature probe for heating controller
1 7940 62	HERZ-RTC-Electronic Control System for Continuous Control

☑ Wiring diagram

1 **7712 11**

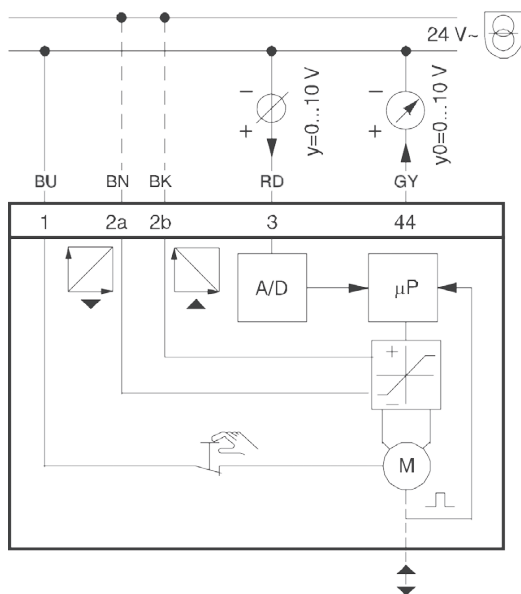


Variante 1 (3pt)

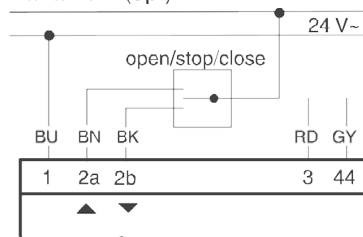


RD = red
BN = brown
BK = black
BU = blue
GY = grey

Variante 2 (2pt)

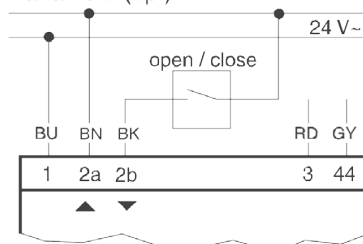


1 **7712 50** or 1 **7712 51**

2-Pt.

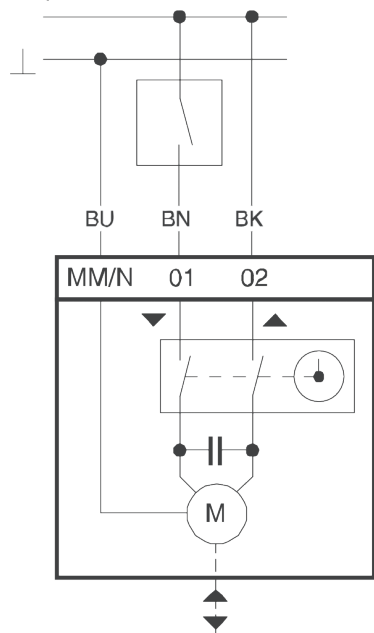

230V~
24V~

3-Pt:

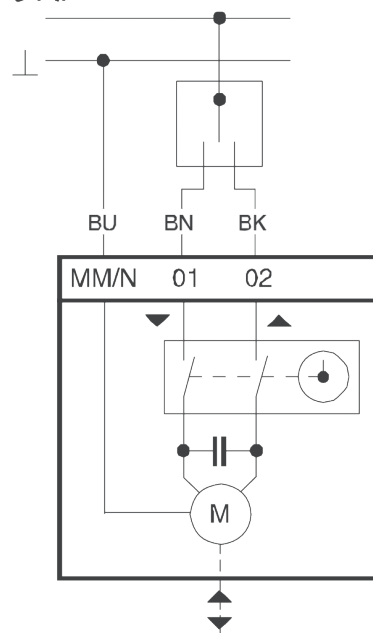

230V~
24V~

