
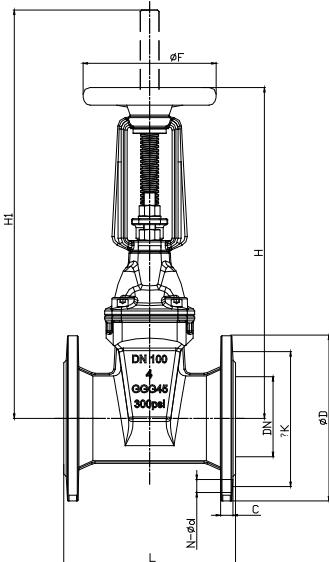
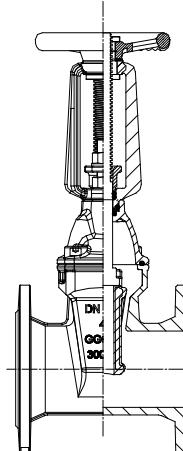


# Gate Valve

Data sheet 4 4113 5x, Issue 0720

## Materials

Body	Ductile Iron/GJS 500-7
Stem	Stainless Steel
Gasket	NBR
Bonnet	Ductile Iron
Bonnet	Ductile Iron
Yoke	Ductile Iron/GJS 500-7
Hand Wheel	Carbon Steel
Wedge	Ductile Iron/GJS 500-7



## Dimensions in mm

ORDER Number	DN	L	H	H1	ØD	Øk	N-Ød	C	ØF
4 4113 51	65	170	338	408	185	145	4-Ø19	18	200
4 4113 52	80	180	393	480	200	160	8-Ø19	18	250
4 4113 53	100	190	441	544	220	180	8-Ø19	18	250
4 4113 54	125	200	559	692	250	210	8-Ø19	18	280
4 4113 55	150	210	598	759	285	240	8-Ø23	18	280
4 4113 56	200	230	743	953	340	295	12-Ø23	18	350
4 4113 57	250	250	880	1140	405	355	12-Ø28	19	350
4 4113 58	300	270	1009	1319	460	410	12-Ø28	21	350

## Specification

Temperature range	: -10°C ... +80°C
Pressure rate	: PN16
Flange Dimensions	: according to EN1092-2
Design standard	: BS 5163;EN1074-2;BS 1171
Coating	: 250 µm epoxy coated

For hot and cold water systems for fluids excluding acid and flammable fluids.  
The use of ethylene or propylene glycol in a mixing ratio 25- 50% is allowed.



All specifications and information within this document are reflecting the information available at the time of going to print and meant for informational purpose only. Herz Armaturen reserves the right to modify and change products as well as its technical specifications and/or its function according to technological progress and requirements. All diagrams are indicative in nature and do not have to be complete. It is understood that all images of Herz products are symbolic representations and therefore may visually differ from the actual product.

Colours may differ due to printing technology used. In case of any further questions don't hesitate to contact your closest HERZ Branch-Office.